






modello: model:	<b>TRIM QUADRO</b>
codice: code:	<b>6337</b>
design:	UT Egoluce
anno - year:	2008
tipologia: typology:	<b>faretto da incasso</b> recessed spotlight
materiali: materials:	<b>alluminio</b> aluminium
luce: light:	<b>radiale doppia emissione</b> radial double emission
sorgente luminosa: light sources:	<b>/XW</b> LED max 1,5W 500mA 199lm 2700K <b>/WW</b> LED max 1,5W 500mA 210lm 3000K <b>/W</b> LED max 1,5W 500mA 221lm 4000K
life:	<b>&gt; 50.000 h</b>
step MacAdam:	<b>3</b>
Indice di Resa Cromatica: Color Rendering Index:	<b>&gt;80</b>
grado IP - IP grade:	<b>40</b>
peso netto - net weight:	<b>0,04 Kg</b>
finiture: finishes:	<b>.01 bianco</b> <b>.45 alluminio anodizzato</b> <b>.01 white</b> <b>.45 anodized aluminium</b>
optional:	<b>0215</b> controcassa in materiale plastico plastic box  <b>0212</b> kit: box + plaster traforato kit: box + perforated plaster
marcatura: marking:	<b>CE</b>
simboli costruttivi: symbols:	  IP40  

**SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION**


#### Dimensioni - Dimensions

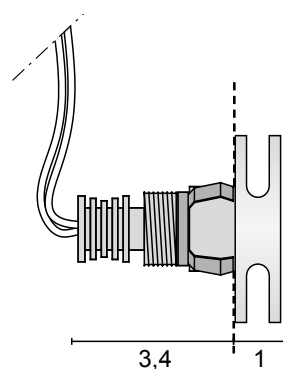

 2 cm






EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: info@egoluce.com - http://www.egoluce.com

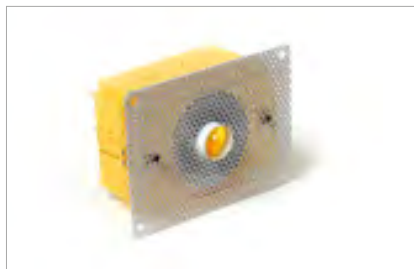**0212**

KIT: box + plaster traforato  
 KIT: box + perforated plaster

**0215**


Controcassa in materiale plastico  
 Plastic box

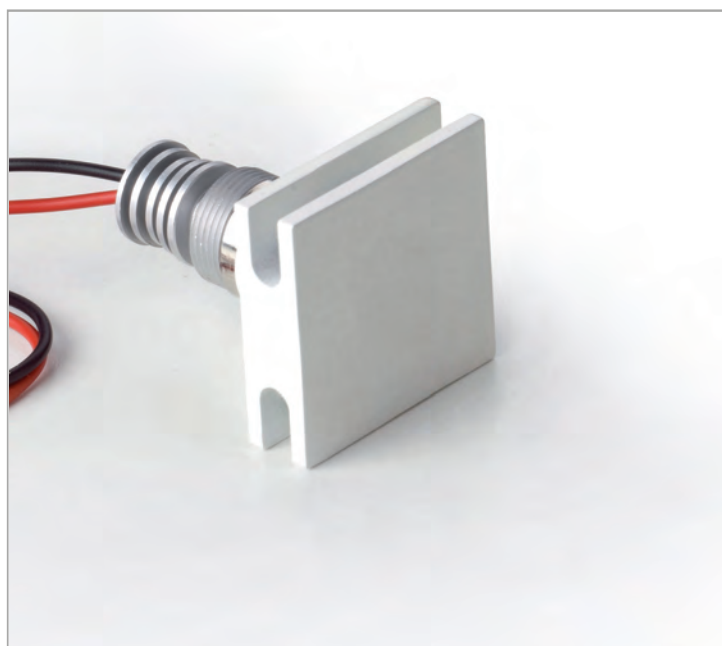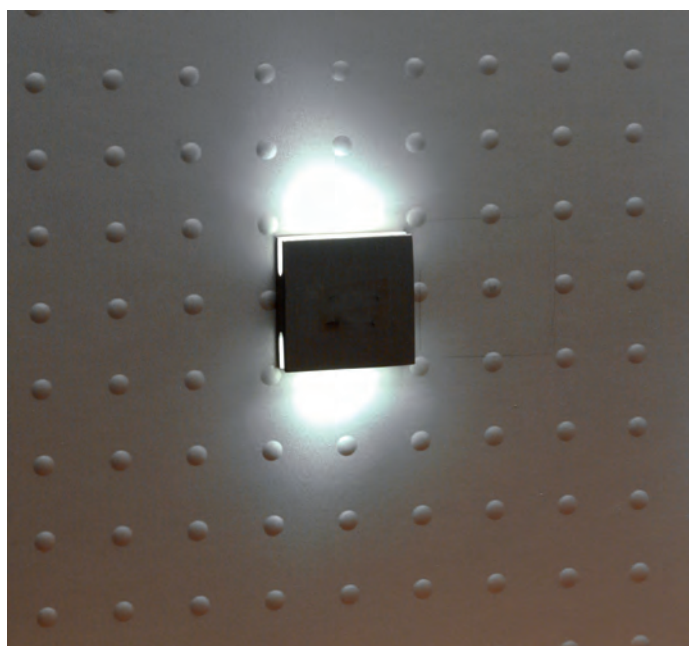


EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
 telefono +39 02 339586.1 - fax. +39 02 3535112  
 e-mail: [info@egoluce.com](mailto:info@egoluce.com) - <http://www.egoluce.com>

**LED DRIVERS** in corrente continua  
**LED DRIVERS** constant current
**0127**

**LED driver**  
 IN: 100 - 240V  
 OUT: 500 mA  
 1-6 Power LED





11,6 x 3,4 x 2 cm  4 cm

SELV CLASS 2  

**0169/50**

**Multipower LED driver**  
 IN: 220 - 240V  
 OUT: 500mA  
 min. 4 max 15 Power LED




13 x 7,5 x 3 cm  8,5 cm

SELV 

**DRIVERS DIMMERABILI** in corrente continua  
**DIMMABLE LED DRIVERS** constant current
**0129 Dimmer LED**


**Multipower dimmable driver**  
 IN: 110 - 240V  
 OUT: 500 mA, 1-14 Power LED







10,5 x 7 x 2,2 cm  7,2 cm SELV    

**0129/DALI Dimmer LED**


**Multipower dimmable driver**  
 IN: 110 - 240V  
 OUT: 500 mA, 2-12 Power LED




10,5 x 7 x 2,2 cm  7,2 cm SELV   

**0141/DALI**

**LED driver**  
 IN: 110 - 240V  
 OUT: 500 mA, 1-11 Power LED




11,1 x 5,2 x 2,5 cm  5,5 cm

**0141/DIM**

**LED driver**  
 IN: 110 - 240V  
 OUT: 500 mA, 1-11 Power LED




Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm  5,5 cm    

**0145 Dimmer LED Maxi**

**Multipower dimmable driver**

IN: 110 - 240V  
 OUT: 500 mA, 1-21 Power LED




12,3 x 8 x 2,2 cm  8,4 cm SELV    

**0145/DALI Dimmer LED Maxi**

**Multipower dimmable driver**

IN: 110 - 240V  
 OUT: 500 mA, 1-21 Power LED



12,3 x 8 x 2,2 cm  8,4 cm SELV     

**0133**

Cavo di sincronizzazione per dimmer LED  
 Synchronization cable for LED dimmer  
 (art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)




L 150 cm


**0726/DIM**

**LED dimmer**

TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)  
 PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)  
 IN: 220 - 240V  
 OUT: 24V - 20W  
 500 mA, 1-12 Power LED



16,5 x 4,5 x 3,5 cm  5,6 cm SELV   



EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
 telefono +39 02 339586.1 - fax. +39 02 3535112  
 e-mail: info@egoluce.com - http://www.egoluce.com