








modello: model:	<b>STEP MINI TONDO</b>
codice: code:	<b>6738</b>
design:	<b>UT Egoluce</b>
anno - year:	<b>2011</b>
tipologia: typology:	<b>faretto da incasso</b> <b>recessed spot</b>
materiali: materials:	<b>alluminio</b> <b>aluminium</b>
luce: light:	<b>diretta/asimmetrica</b> <b>direct/asymmetric</b>
sorgente luminosa: light sources:	<b>/W</b> LED 1W 350mA 158lm 4000K <b>/WW</b> LED 1W 350mA 150lm 3000K <b>/XW</b> LED 1W 350mA 143lm 2700K
life:	<b>&gt; 50.000 h</b>
step MacAdam:	<b>3</b>
Indice di Resa Cromatica: Color Rendering Index:	<b>&gt;80</b>
grado IP - IP grade:	<b>65</b>
peso netto - net weight:	<b>0,08 Kg</b>
finiture - finishes:	<b>.01 bianco</b> <b>.01 white</b>
optional:	<b>0214</b> <b>box + plaster</b> <b>0217</b> <b>controcassa in materiale plastico</b> <b>plastic box</b>
marcatura: marking:	<b>CE</b>
simboli costruttivi: symbols:	  <b>IP65</b>   

**SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION**

#### Dimensioni - Dimensions

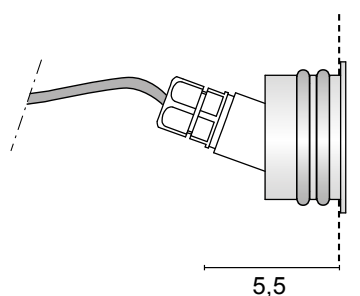


#### Accessori - Accessories



**0214**  
KIT: box + Plaster



**0217**  
Controcassa in materiale plastico  
Plastic box



EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: info@egoluce.com - http://www.egoluce.com

**LED DRIVERS** in corrente continua  
**LED DRIVERS** constant current
**0125**

**LED driver**  
 IN: 100 - 240V  
 OUT: 350 mA  
 1-6 Power LED




6 x 3,5 x 2 cm 4 cm

SELV

**0128**

**LED driver**  
 IN: 100 - 240V  
 OUT: 350 mA  
 1-10 Power LED




11,6 x 3,4 x 2 cm 4 cm

SELV CLASS 2

**0136/15**

**LED driver**  
 IN: 100 - 240V  
 OUT: 350 mA  
 1-10 Power LED




15,8 x 2,2 x 2 cm 3,2 cm

SELV

**0169/50**

**Multipower LED driver**  
 IN: 220 - 240V  
 OUT: 350mA  
 min. 4 - max 22 Power LED




13 x 7,5 x 3 cm 8,5 cm

SELV

**DRIVERS DIMMERABILI** in corrente continua  
**DIMMABLE LED DRIVERS** constant current
**0129 Dimmer LED**


**Multipower dimmable driver**  
 IN: 110 - 240V  
 OUT: 350 mA  
 4-15 Power LED



10,5 x 7 x 2,2 cm 7,2 cm SELV

**0129/DALI Dimmer LED**

**Multipower dimmable driver**  
 IN: 110 - 240V  
 OUT: 350 mA  
 2-12 Power LED




10,5 x 7 x 2,2 cm 7,2 cm

SELV

**0141/DALI**


**LED driver**  
 IN: 110 - 240V  
 OUT: 350 mA  
 1-12 Power LED



11,1 x 5,2 x 2,5 cm 5,5 cm

**0141/DIM**

**LED driver**  
 IN: 110 - 240V  
 OUT: 350 mA  
 1-12 Power LED




**Versione PUSH non sincronizzabile - PUSH version not synchronizable**

11,1 x 5,2 x 2,5 cm 5,5 cm

**0145 Dimmer LED Maxi**


**Multipower dimmable driver**  
 IN: 110 - 240V  
 OUT: 350 mA  
 1- 21 Power LED



12,3 x 8 x 2,2 cm 8,4 cm SELV

**0145/DALI Dimmer LED Maxi**

**Multipower dimmable driver**  
 IN: 110 - 240V  
 OUT: 350 mA  
 1- 21 Power LED



12,3 x 8 x 2,2 cm 8,4 cm SELV

**0133**


Cavo di sincronizzazione per dimmer LED  
 Synchronization cable for LED dimmer  
 (art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)




L 150 cm

**IP LED DRIVERS** in corrente continua  
**IP LED DRIVERS** constant current
**0031/IP**

**LED driver**  
 IN: 220 - 240V  
 OUT: 350 mA  
 1-12 Power LED 1W



3,9 x 8 x 2 cm 4,2 cm IP67 SELV



EGOLUCE s.r.l., via I.Newton 12 - 20016 Pero - Milano  
 telefono +39 02 339586.1 - fax. +39 02 3535112  
 e-mail: info@egoluce.com - http://www.egoluce.com