




## Dimensioni - Dimensions

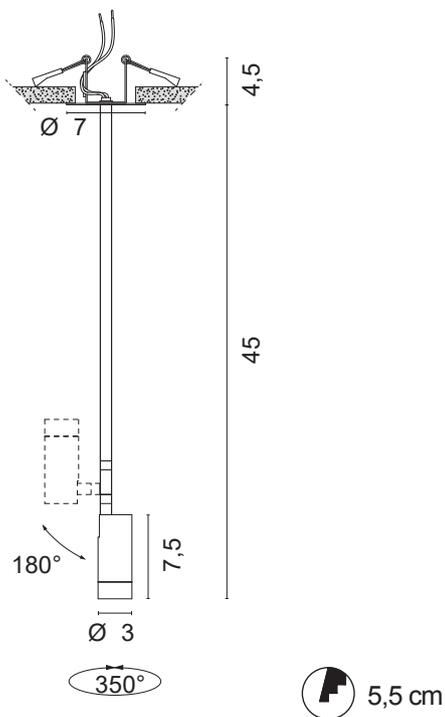

modello:  
model:

**IRIS**

codice:  
code:

**6754**

design:

**Lux Studio**

anno - year:

**2022**

tipologia:

tipology:

**proiettore orientabile da plafone  
adjustable ceiling projector**

materiali:

materials:

**struttura in alluminio  
aluminum structure**

luce:

light:

**diretta  
direct**

sorgente luminosa:

light sources:

Color temperature		Optics	LED light source	lm source	lm output
<b>/W</b>	<b>/25 /48 /63</b>		5,9W 17V 350mA 4000K	1060lm	880lm
<b>/W</b>	<b>/ST</b>	$\dot{U}_{\text{max}} \dot{A}   \text{ae} \cdot \dot{A}$	5,9W 17V 350mA 4000K	1060lm	816lm
<b>/WW</b>	<b>/25 /48 /63</b>		5,9W 17V 350mA 3000K	1030lm	855lm
<b>/WW</b>	<b>/ST</b>	$\dot{U}_{\text{max}} \dot{A}   \text{ae} \cdot \dot{A}$	5,9W 17V 350mA 3000K	1030lm	793lm
<b>/XW</b>	<b>/25 /48 /63</b>		5,9W 17V 350mA 2700K	969lm	804lm
<b>/XW</b>	<b>/ST</b>	$\dot{U}_{\text{max}} \dot{A}   \text{ae} \cdot \dot{A}$	5,9W 17V 350mA 2700K	969lm	746lm

life

**> 50.000 h**

step MacAdam

**3**

Indice di Resa Cromatica:

Color Rendering Index:

**>80****CRI>90 su richiesta  
CRI>90 on request**

grado IP - IP grade:

**20**

peso netto - net weight:

**0,25 Kg**

finiture - finishes:

**.01 bianco****.01 white****.02 nero****.02 black**

optionals:

**0267 frangiluce - louvres**

marcatore:

marking:




simboli costruttivi:

symbols:



- Dissipazione passiva
- Inclinazione di 180° sul piano orizzontale
- Rotazione di 350° sull'asse verticale

- Passive dissipation
- 180° inclination on a horizontal plane
- 350° rotation on vertical axis



La presente scheda tecnica è di proprietà di EGOLUCE srl. Tutti i diritti sono riservati. Le fotografie, le descrizioni degli apparecchi, i disegni quotati ed i valori fotometrici menzionati sono a titolo indicativo e non costituiscono alcun impegno per la nostra società che si riserva di apportare, in qualsiasi momento e senza preavviso, tutte le modifiche che riterrà opportune.

EGOLUCE s.r.l, via I. Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: info@egoluce.com - http://www.egoluce.com

### aperture ottiche - *beams optic*



optic 25°



optic 48°



optic 63°

vetro satinato - *satin glass*


### inclinazioni - *inclinations*



### finiture - *finishies*

.01 bianco - *white*.02 nero - *black*

### optionals

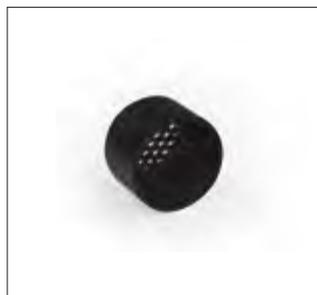**0267/S**Frangiluce - *Louvres*.01 Bianco - *White***0267/S**Frangiluce - *Louvres*.02 Nero - *Black*


EGOLUCE s.r.l, via I. Newton 12 - 20016 Pero - Milano  
 telefono +39 02 339586.1 - fax. +39 02 3535112  
 e-mail: [info@egoluce.com](mailto:info@egoluce.com) - <http://www.egoluce.com>

# alimentatori - drivers

## LED DRIVERS in corrente continua LED DRIVERS constant current

### 0125



**LED driver**  
IN: 100 - 240V  
OUT: 350 mA  
1 Iris



## DRIVERS DIMMERABILI in corrente continua DIMMABLE LED DRIVERS constant current


### 0129 Dimmer LED

**Multipower dimmable driver**  
IN: 110 - 240V  
OUT: 350 mA  
1 - 2 Iris




### 0129/DALI Dimmer LED

**Multipower dimmable driver**  
IN: 110 - 240V  
OUT: 350 mA  
1 - 2 Iris




### 0141/DALI

**LED driver**  
IN: 110 - 240V  
OUT: 350 mA  
1 - 2 Iris



### 0141/DIM

**LED driver**  
IN: 110 - 240V  
OUT: 350 mA  
1 - 2 Iris





Versione PUSH non sincronizzabile - PUSH version not synchronizable




### 0145 Dimmer LED Maxi

**Multipower dimmable driver**  
IN: 110 - 240V  
OUT: 350 mA, 1 - 3 Iris




### 0145/DALI Dimmer LED Maxi

**Multipower dimmable driver**  
IN: 110 - 240V  
OUT: 350 mA, 1 - 3 Iris




### 0133

Cavo di sincronizzazione per dimmer LED  
Synchronization cable for LED dimmer  
(art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)



### 0733/DIM

Dimmable driver  
TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)  
PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)  
IN: 220 - 240V  
OUT: 350 mA - 1 COB LED



## UNITÀ DI EMERGENZA LED LED EMERGENCY UNIT

### 0115/EM

Kit Inverter + Battery

